

Diaphragm Valves

for Atomic Layer Deposition



Atomic Layer Deposition (ALD) Diaphragm Valves

- Ultrahigh cycle life with high-speed actuation
- C_v range from 0.27 to 0.62
- Up to 392°F (200°C) capability with thermal actuators
- Electronic actuator position-sensing option
- Suitable for ultrahigh-purity applications with 316L VIM-VAR stainless steel body
- VCR®, tube butt weld, and modular surface-mount end connections

Contents

Features	2
Materials of Construction	3
Process Specifications	3
Technical Data	3

Ordering Information and Dimensions

Two-Port Valves	4
Modular Surface-Mount Valves	5
Options and Accessories	6
Multiport and Elbow Valves and Multivalve Manifolds	7

Features

- Normally closed and normally open pneumatic actuation
- Flow coefficients of 0.27 to 0.62 standard; custom flow coefficients available
- Two-port straight and elbow configurations
- Two-, three- and four-port multiport valves and multivalve manifolds
- Two- and three-port modular surface-mount valves in 1.125 in. (ALD3 series only) and 1.5 in. platforms
 - C-seal design (all valves)
 - W-seal design (ALD3 series only)
- VCR, “H” Type VCR, and tube butt weld end connections in 1/4, 3/8, and 1/2 in. and 6, 10, and 12 mm sizes



Diaphragm

- Cobalt-based superalloy (UNS R30003) material for strength and corrosion resistance
- Optimized, patent-pending design for ultrahigh cycle life

Seat

- Fully contained seat design
- High-purity grade PFA, fully fluorinated
- Ultrahigh cycle life
- Broad range of chemical compatibility
- Excellent resistance to swelling and contamination
- High-integrity seat seal performance

Body

- Body seal provides ultrahigh cycle life
- 316L VIM-VAR stainless steel body material for ultrahigh-purity applications
- Fully swept flow path
 - minimizes entrapment areas
 - facilitates purging
 - maximizes flow capacity
- Optional body holes to accommodate heater cartridges

Actuators

Standard

- Pneumatic actuator for high-speed and repeatable actuation
- Capable of valve opening or closing time of less than 5 ms
- Factory-set flow adjusting mechanism ensures precise and consistent C_v from valve to valve
- Optional factory-set electronic actuator-position sensor verifies open position of pneumatically actuated valves
- Optional solenoid pilot valve for electronic control of high-speed actuation

Thermal

Same performance and options as standard actuator with the following additional features:


- Includes thermal isolation coupling for thermal applications
- Limits conductive heat transfer from the body to the actuator
- Provides a more uniform valve body temperature to reduce cold spots
- Significantly reduces electrical power required to heat the valve
- Extends the life of the actuator in applications where the body is heated

Materials of Construction

Component	Material Grade/ASTM Specification
1 Pneumatic actuator assembly	—
Cylinder, cap	Aluminum
Pistons	Powdered metal 300 series SS—normally open; aluminum—normally open and normally closed
Base	Powdered metal 300 series SS—normally open; none—normally closed
Flow adjusting mechanism	316 SS/A479
O-rings	Fluorocarbon FKM
Springs	S17700
Button	316 SS/A479
Bushing	Carbon-filled PTFE
2 Thermal isolation coupling housing (thermal model only)	316 SS/A479
3 Thermal isolation coupling stem (thermal model only)	S17400
4 Bonnet nut	316 SS/A479
5 Bonnet	S17400
6 Diaphragm	Cobalt-based superalloy (UNS R30003)/AMS 5876
7 Seat	High-purity PFA Type II/D3307
8a Body	316L VIM-VAR SS/SEMI F20-0305 Ultrahigh-Purity ^①
8b Welded VCR end connections	316L VAR SS/SEMI F20-0305 High-Purity ^①
Lubricant	PTFE-based

Wetted components listed in *italics*.

① 20 % minimum elongation allowed.

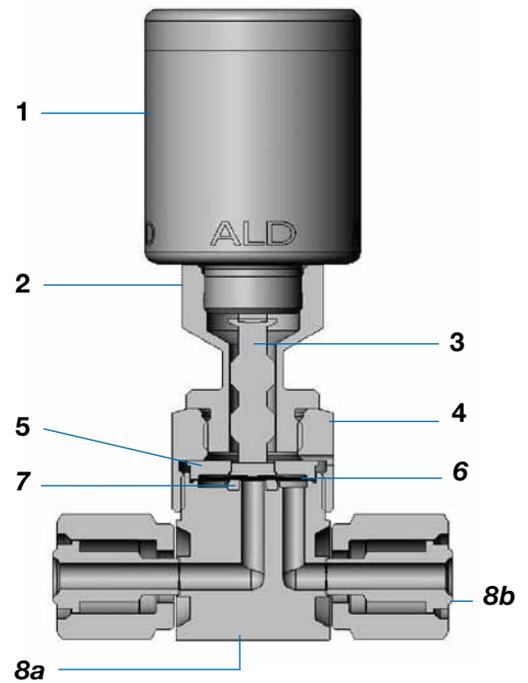

Normally Closed Actuator Shown

Process Specifications

See Swagelok® *Ultrahigh-Purity Process Specification (SC-01)*, MS-06-61, for details on processes, process controls, and process verification.

Cleaning	Assembly and Packaging	Wetted Surface Roughness (R_a)	Testing
Ultrahigh-purity cleaning with a continuously monitored, deionized water, ultrasonic cleaning system	Performed in ISO Class 4 work areas; valves are double bagged and vacuum sealed in cleanroom bags.	Electropolished and finished to an average of 5 $\mu\text{in.}$ (0.13 μm)	ALD3 normally closed: Inboard helium leak tested to a rate of 1×10^{-9} std cm^3/s at the seat, envelope, and all seals. ALD3 and ALD6 normally open and ALD6 normally closed: Inboard helium leak tested to a rate of 1×10^{-8} std cm^3/s at the seat and to a rate of 1×10^{-9} std cm^3/s at the envelope and all other seals.

Technical Data

Valve Series	Working Pressure psig (bar)		Temperature Rating °F (°C)			Flow Coefficient (C_v) ^④	Orifice in. (mm)	Internal Volume ^⑤ in. ³ (cm ³)		Pneumatic Actuator ^⑤	
			Operating ^{②③}		Short-Term Bakeout			Tube Butt Weld Body	2-Port Surface-Mount	Actuation Pressure psig (bar)	Air Displacement in. ³ (cm ³)
	Operating ^①	Burst	Standard Actuator	Thermal Actuator ^②							
Normally Closed Actuation											
ALD3	Vacuum to 145 (10.0)	>3200 (220)	32 to 248 (0 to 120)	32 to 392 (0 to 200)	392 (200) (valve open)	0.27	0.16 (4.1)	0.086 (1.4)	0.048 (0.79)	50 to 90 (3.5 to 6.2)	0.042 (0.69)
ALD6						0.62	0.23 (5.8)	0.26 (4.3)	0.084 (1.4)		0.075 (1.2)
Normally Open Actuation											
ALD3	Vacuum to 145 (10.0)	>3200 (220)	32 to 248 (0 to 120)	32 to 392 (0 to 200)	392 (200) (valve open)	0.27	0.16 (4.1)	0.086 (1.4)	0.048 (0.79)	70 to 90 (4.9 to 6.2)	0.027 (0.44)
ALD6						0.62	0.23 (5.8)	0.26 (4.3)	0.084 (1.4)		0.046 (0.75)

① Recommended operating pressure of less than 35 psig (2.4 bar) for optimal cycle life.

② Actuator temperature is limited to 248°F (120°C); valve body temperature is rated to 392°F (200°C).

③ See pages 6 and 7 for maximum operating temperatures for products with an electronic actuator-position sensor, solenoid pilot valve, or both.

④ Custom flow coefficients available; contact your authorized Swagelok representative for more information.

⑤ ALD3 series 1.125 in. platform surface-mount valve:

■ Internal volume for 2-port body: 0.078 in.³ (1.3 cm³)

■ Actuation pressure: normally closed, 60 to 90 psig (4.2 to 6.2 bar); normally open, 70 to 90 psig (4.9 to 6.2 bar).

■ Air displacement: 0.03 in.³ (0.49 cm³).


Ordering Information and Dimensions

Dimensions, in inches (millimeters), are for reference only and are subject to change.

Two-Port Valves


For a complete ordering number, add **C** for a normally closed actuator or **NO** for a normally open actuator.

Normally Closed Standard Actuator

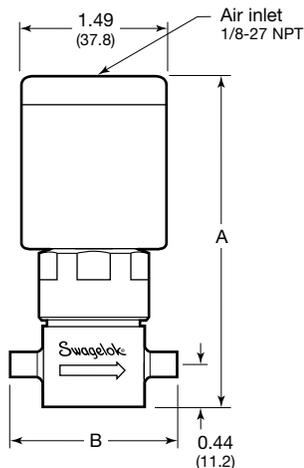


Butt Weld End Connections

Normally Closed Thermal Actuator

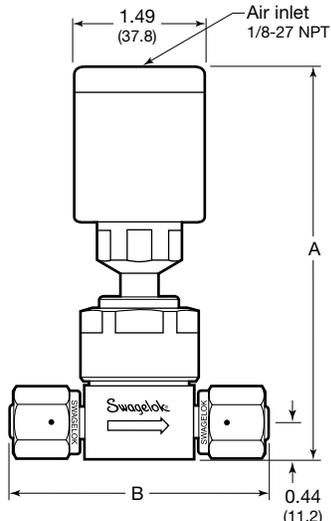


Female VCR Fitting End Connections

Normally Open Standard Actuator

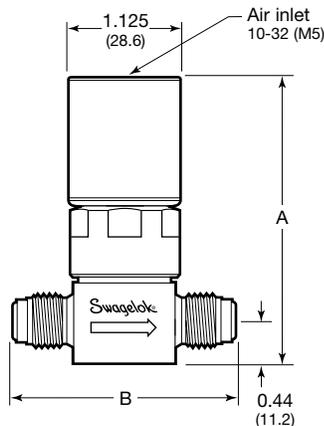


Integral Male VCR Fitting End Connections

ALD3 Bottom



Four mounting holes, M5 × 0.8-6H thread, 0.25 (6.4) deep, located 45° from center line, on a 1.00 (25.4) bolt circle. M5 × 0.8-6H holes are compatible with 10-32 mounting screws.

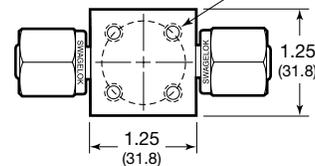

ALD6 Bottom

End Connections		Standard Actuator Ordering Number	Thermal Actuator Ordering Number	Dimensions, in. (mm)		
				A		B
Inlet/Outlet	Size					
ALD3 Series						
Female VCR fitting	1/4 in.	6LVV-ALD3FR4-P-	6LVV-ALD3TFR4-P-	3.50 (88.9) (standard actuator)	3.22 (81.8) (standard actuator)	2.78 (70.6)
Integral male VCR fitting	1/4 in.	6LVV-ALD3VR4-P-	6LVV-ALD3TVR4-P-			2.30 (58.4)
Rotatable male VCR fitting	1/4 in.	6LVV-ALD3MR4-P-	6LVV-ALD3TMR4-P-			2.78 (70.6)
Tube butt weld, 0.30 in. long	1/4 × 0.035 in.	6LVV-ALD3BW4-P-	6LVV-ALD3TBW4-P-	4.50 (114) (thermal actuator)	4.22 (107) (thermal actuator)	1.74 (44.2)
Tube butt weld, 0.26 in. long	1/4 × 0.035 in.	6LVV-ALD3BW4S-P-	6LVV-ALD3TBW4S-P-			1.61 (40.9)
Tube butt weld, 7.6 mm long	6 × 1 mm	6LVV-ALD3BW6M-P-	6LVV-ALD3TBW6M-P-			1.74 (44.2)
ALD6 Series						
Female VCR fitting	1/2 in.	6LVV-ALD6FR8-P-	6LVV-ALD6TFR8-P-	3.76 (95.5) (standard actuator)	3.48 (88.4) (standard actuator)	4.16 (106)
Female "H" type VCR fitting	1/4 in.	6LVV-ALD6HFR4-P-	6LVV-ALD6THFR4-P-			2.78 (70.6)
Female/rotatable male "H" type VCR fitting	1/4 in.	6LVV-ALD6HFR4HMR4-P-	6LVV-ALD6THFR4HMR4-P-			2.96 (75.2)
Rotatable male VCR fitting	1/2 in.	6LVV-ALD6MR8-P-	6LVV-ALD6TMR8-P-			4.16 (106)
Rotatable male "H" type VCR fitting	1/4 in.	6LVV-ALD6HMR4-P-	6LVV-ALD6THMR4-P-			2.96 (75.2)
Tube butt weld, 0.50 in. long	3/8 × 0.035 in. 1/2 × 0.049 in.	6LVV-ALD6BW6-P- 6LVV-ALD6BW8-P-	6LVV-ALD6TBW6-P- 6LVV-ALD6TBW8-P-			4.76 (121) (thermal actuator)
Tube butt weld, 12.7 mm long	10 × 1 mm	6LVV-ALD6BW10M-P-	6LVV-ALD6TBW10M-P-			
	12 × 1 mm	6LVV-ALD6BW12M-P-	6LVV-ALD6TBW12M-P-			

Ordering Information and Dimensions

Dimensions, in inches (millimeters), are for reference only and are subject to change.

Modular Surface-Mount Valves

C-Seal Design

For a complete ordering number, add **C** for a normally closed actuator or **NO** for a normally open actuator.

ALD series 1.5 in. platform modular surface-mount valves with C-seals are IGC® II compatible. For more information about IGC II integrated gas components, see the *IGC II Integrated Gas Components—Substrates, Manifolds, Mounting Components, and Assembly Hardware* catalog, MS-02-134.



W-Seal Design

Insert **W** into an ALD3 series ordering number as shown.


Examples:

- 6LVV-MSM-ALD3E-W2-P-C for a 1.125 in. 2-port valve with standard actuator
- 6LVV-MSM-ALD3T-W3-P-C for a 1.5 in. 3-port valve with thermal actuator

Normally Closed Thermal Actuator, 1.125 in. Platform


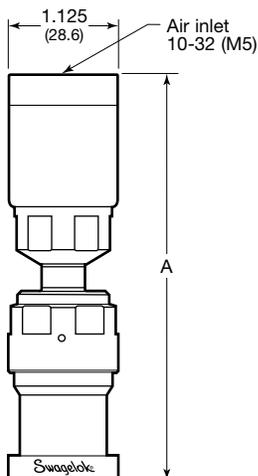


1.125 in. C-Seal Platform Bottom





1.125 in. W-Seal Platform Bottom

Normally Closed Standard Actuator 1.5 in. Platform

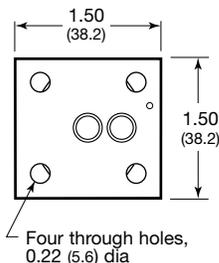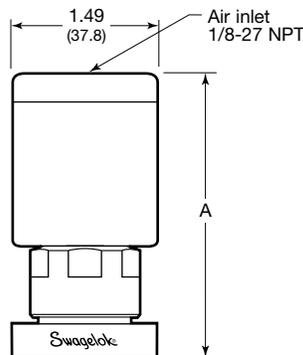

1.5 in. C-Seal Platform Bottom

Normally Open Standard Actuator 1.5 in. Platform

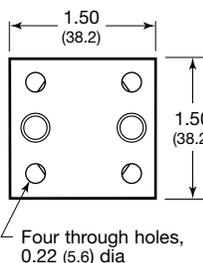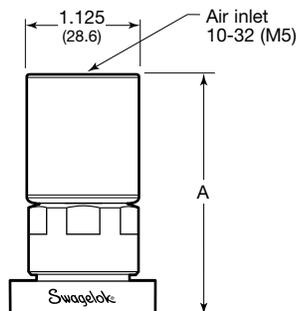


1.5 in. W-Seal Platform Bottom

Surface-Mount Platform	Ports	Standard Actuator Ordering Number	Thermal Actuator Ordering Number	A, in. (mm)			
				Normally Closed		Normally Open	
				C-Seal	W-Seal	C-Seal	W-Seal
ALD3 Series							
1.125 in.	2	6LVV-MSM-ALD3E-2-P-	6LVV-MSM-ALD3ET-2-P-	3.40 (86.4) (standard)	3.40 (86.4) (standard)	3.45 (87.6) (standard)	3.45 (87.6) (standard)
	3	6LVV-MSM-ALD3E-3-P-	6LVV-MSM-ALD3ET-3-P-	4.40 (112) (thermal)	4.40 (112) (thermal)	4.45 (113) (thermal)	4.45 (113) (thermal)
1.5 in.	2	6LVV-MSM-ALD3-2-P-	6LVV-MSM-ALD3T-2-P-	3.02 (76.7) (standard)	3.70 (94.0) (standard)	2.74 (69.6) (standard)	3.42 (86.9) (standard)
	3	6LVV-MSM-ALD3-3-P-	6LVV-MSM-ALD3T-3-P-	4.02 (102) (thermal)	4.70 (119) (thermal)	3.74 (95.0) (thermal)	4.42 (112) (thermal)
ALD6 Series							
1.5 in.	2	6LVV-MSM-ALD6-HF2-P-	6LVV-MSM-ALD6T-HF2-P-	3.15 (80.0) (standard)	—	2.87 (72.9) (standard)	—
	3	6LVV-MSM-ALD6-HF3-P-	6LVV-MSM-ALD6T-HF3-P-	4.15 (105) (thermal)	—	3.87 (98.3) (thermal)	—

Options and Accessories

Valves with electronic actuator-position sensors (right), solenoid pilot valve assemblies (page 7), and heater cartridge holes (page 7) are available.

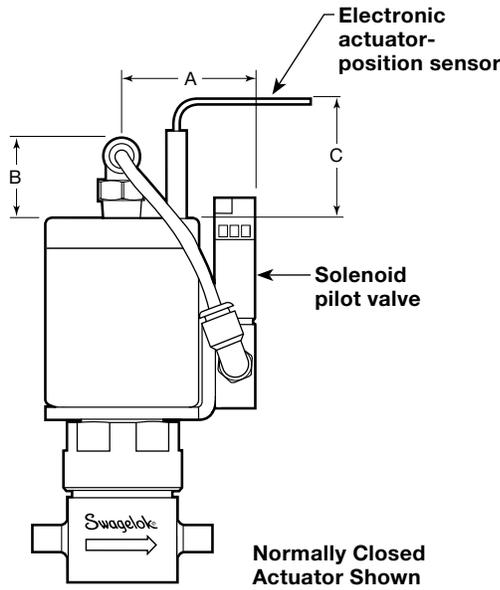


Dimensions

Actuator	Dimensions, in. (mm)		
	A	B	C
Normally closed	1.28 (32.5)	0.70 (17.8)	0.60 (15.2)
Normally open	1.14 (29.0)	0.63 (16.0)	1.18 (30.0)

Ordering Information

To order one option, add a designator to the valve ordering number. To order two or more options, add the designators in the sequence shown below.

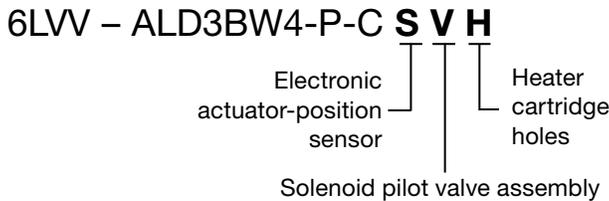

Examples:

6LVV-ALD3BW4-P-CH for a valve with heater cartridge holes

6LVV-ALD3BW4-P-CS for a valve with electronic actuator-position sensor with short pigtail electrical connector

6LVV-ALD3BW4-P-CSLH for a valve with electronic actuator-position sensor with long cable with flying leads electrical connector and heater cartridge holes

6LVV-A3T1V333P-AAV for a multivalve manifold with solenoid pilot valve assembly on valve 2

6LVV-A31V333P-ASVASV for a multivalve manifold with electronic actuator-position sensor with short pigtail electrical connector and solenoid pilot valve assembly on both valves


Electronic Actuator-Position Sensors

Transmit a signal to an electrical device indicating the open position of pneumatically actuated valves. Sensors and electrical connectors described below are third-party products.

Sensor Technical Information

Output	3-wire V (dc) – transistor (current-sourcing)
Output Function	Normally open
Voltage	10 to 30 V (dc) polarity protected – pulsed SCP
Operating Temperature	-23 to 70°C (-10 to 158°F)

Wiring Diagram

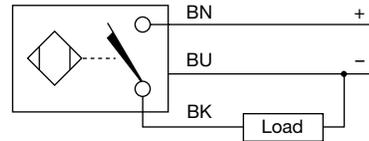

Factory-Assembled Electronic Actuator-Position Sensors

Factory-assembled position sensors are set for optimum performance and sealed with a polyester film label that provides visible evidence of disassembly or adjustment.

To order an electronic actuator-position sensor factory assembled to a valve, add a designator to the valve ordering number.

Examples:

6LVV-ALD3BW4-P-CS

6LVV-MSM-ALD6-HF2-P-CSL

Sensor Electrical Connector	Designator
Short pigtail ^①	S
Long cable with flying leads	SL

^① A mating direct-current M8 3-wire push-on straight female connector is available.


Ordering number:
MS-CS-BALF-1

Options and Accessories

Solenoid Pilot Valve Assemblies

Fast-acting, high-flow solenoid pilot valve enhances ALD series valve response time.

- Includes tubing, connectors, and rotatable mounting bracket for installation versatility.
- See illustration on page 6 for assembly dimensions.
- See table below for technical information. For additional technical information, see MAC[®] valve part number 34C-ABA-GDFC-1KT.

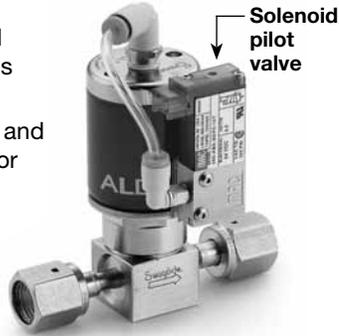

Solenoid Pilot Valve Technical Information

Component	MAC valve 34C-ABA
Solenoid Pilot Valve	24 V, 4 W
	Temperature rating: 50°C (122°F) maximum, continuous use
	Porting: M5 × 0.8-6H thread, compatible with 10-32 screws
Push-to-Connect Fitting	Material: polybutylene terephthalate (PBT), polypropylene, and C3604BD brass
Tubing	Material: polyurethane

Factory-Assembled Solenoid Pilot Valves

To order a solenoid pilot valve factory assembled, add **V** to the ordering number.

Examples: 6LVV-ALD3BW4-P-CV
6LVV-MSM-ALD6-2-P-CV

In modular surface-mount systems, the solenoid pilot valve may interfere with adjacent components.

Solenoid Pilot Valves for Field Assembly


Ordering number for a solenoid pilot valve component only:

MS-PVK-ALD-MAC34CA

Heater Cartridge Holes

Valves are available with holes in the body to accommodate heater cartridges.

- Hole size: 1/8 in. through holes for two-port, three-port, and elbow bodies; 1/8 by 1 in. deep holes for monoblock bodies.
- Two-port and monoblock bodies feature two body holes; three-port and elbow bodies feature one body hole. For more information, contact your authorized Swagelok representative.

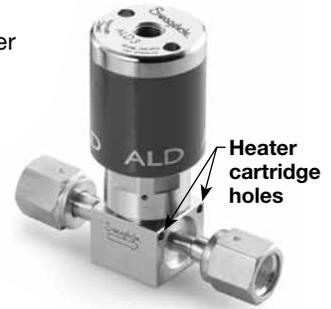

Ordering Information.

To order a valve with heater cartridge holes, add **H** to the ordering number.

Example: 6LVV-ALD3BW4-P-CH

Heater cartridge holes are not available for modular surface-mount valves.

Multiport and Elbow Valves and Monoblock Manifolds

ALD series valves are available in multiport and elbow configurations and monoblock manifolds; see the Swagelok *Bellows- and Diaphragm-Sealed Multiport and Elbow Valves and Monoblock Manifolds* catalog, MS-02-442.

Safe Product Selection

When selecting a product, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user.

Caution: Do not mix or interchange parts with those of other manufacturers.

Warranty Information

Swagelok products are backed by The Swagelok Limited Lifetime Warranty. For a copy, visit swagelok.com or contact your authorized Swagelok representative.

IGC, Swagelok, VCR—TM Swagelok Company
MAC—TM MAC Valves, Inc.
© 2007–2014 Swagelok Company
Printed in U.S.A. AGS
August 2014, R10
MS-02-301