

DOMELOADED PRESSURE REGULATOR RD(H)6

GASES • LIQUIDS • ACIDS • OILS



MAIN FEATURES

- ss 316L
- balanced valve
- Cv 1.95
- bubble tight shut-off
- diaphragm sensing
- 1/4" npt outlet gaugeport
- choice of o-ring materials
- shell design according to EN 12516
- delivery according to PED

CHARACTERISTICS

Inlet pressure : 70 bar, 400 bar
 Outlet ranges : 0 – 70 bar, 0 – 400 bar
 Ratio dome / outletpressure : 1:1
 Seat diameter : 10 mm
 Cv (Kv) : 1.95 (1.66)

Materials:

- Body & Trim : ss 316L
- Dome : ss 316L
- Seat insert : RD6 : elastomer
RDH6 : pctfe, peek
- Seals : elastomer

Connections:

- Line brass : 3/4" bspp
- Line ss316L : 3/4" bspp, 3/4" npt, flanges to DIN / ANSI B16.5


- Dome : 1/4" bspp
- Outlet gauge : 1/4" npt
- Weight : 4 kg (without flanges)
- Temperature range : -20°C to +80 °C *

CLEANING


This regulator is ultrasonically cleaned and degreased. Oxygen cleaning based on ASTM-G93 Level C / CGA 4.1 is optional.

Do not use teflon tape or anaerobic sealing compounds on the bspp threads.

*Actual range depends on choice of seat and seal material.

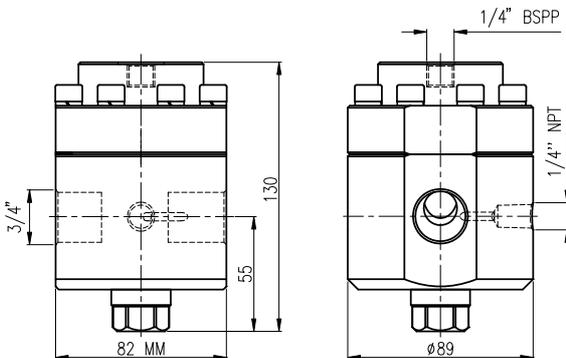

PORTING STYLE


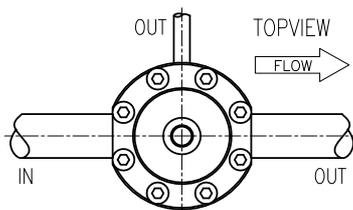


⚠ Swagelok regulators are not “Safety Accessories” as defined in the Pressure Equipment Directive 97/23/EC:

⚠ Do not use the regulator as a shut off device.

RHPS Series

Swagelok

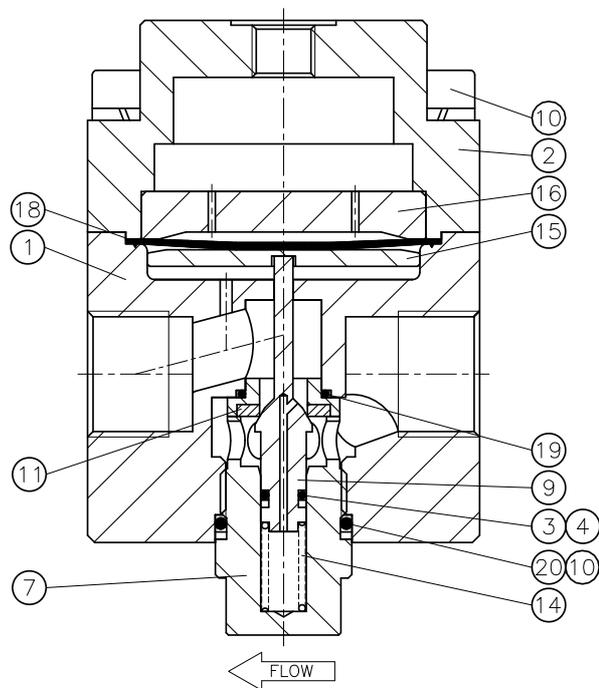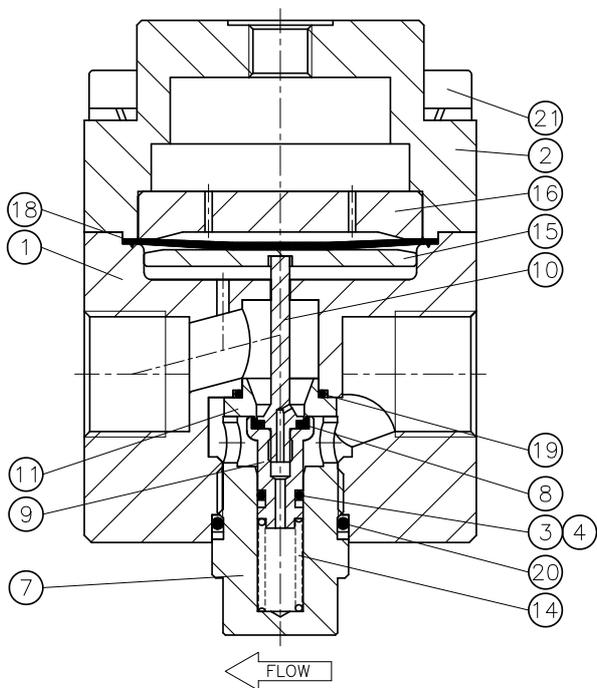

GAUGEPORT(S)
standard:



options:



GN2
(not in combination with flanges)



GN4



GN5
(not in combination with flanges)

ORDERING INFORMATION

example: RDHB6-02-NNK

RDH	B6	- 02	- N	N	K		
series / inlet	connection	flange facing*	material	o-rings	diaphragm	seat	options
RD = 70 bar RDH = 400 bar	B6 = 3/4" bspp N6 = 3/4" npt ansi flanges FA6A = 3/4" class 150 FA6B = 3/4" class 300 FA6C = 3/4" class 600 FA6E = 3/4" class 1500 FA6F = 3/4" class 2500 din flanges FD6M = DN20 PN16 FD6N = DN20 PN40 FD6P = DN20 PN64 FD6R = DN20 PN250 FD6S = DN20 PN400	(if flanges are ordered) 1 = raised face smooth 3 = RTJ	02 = ss316L	N = nitrile E = epdm V = viton	N = nitrile E = epdm V = viton	RD: N = nitrile E = epdm V = viton RDH: K = pctfe P = peek	G* = gauge port PR = pilot regulator *see gauge port options

Red text identifies an example ordering number.

Safe Product Selection
When selecting a product, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user.

RHPS, Swagelok—TM Swagelok Company
© 2010 Swagelok Company
Printed in U.S.A., OM
June 2010, R0
MS-02-392-E