

UBV

Utility Ball Valve (UBV)


Brass 600 WOG 2-PC. Full Bore

Features

- NPT threaded ends
- Forged brass body
- Anti blow-out stem
- 600 W.O.G.
- 150 PSIG saturated steam
- Adjustable stem packing nut
- UL listed under guides YSDT and YRPV




Item	Parts	Material
1	Body	Forged Brass UNS#C37700
2	Seat	Virgin PTFE
3	Ball	Copper Alloy, Cu>57%, Cr Plated
4	Stem Packing	Virgin PTFE
5	Nut	Corrosion Resistant Plated Steel
6	Stem	Brass, ASTM B16, UNS#C3600
7	Retainer	Forged Brass, UNS#C37700
8	Handle	Corrosion Resistant Plated Steel
9	Gland	Brass, ASTM B16, UNS#C36000

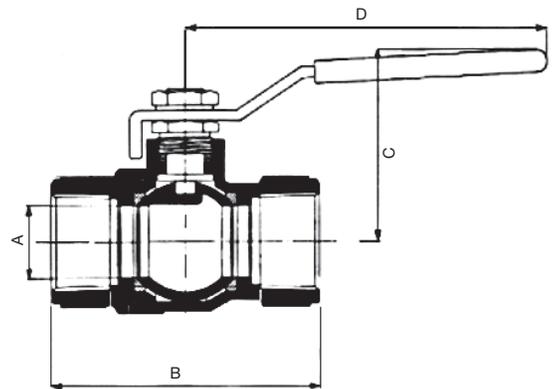

NPS	A	B	C	D	WT LBS	Ordering Number
1/4"	.395	1.746	1.278	3.543	.33	BR2FT-025
3/8"	.393	1.756	1.278	3.543	.3	BR2FT-038
1/2"	.551	2.047	1.921	3.543	.44	BR2FT-050
3/4"	.748	2.362	2.087	3.78	.66	BR2FT-075
1"	.944	2.756	2.559	4.528	1.1	BR2FT-100
1 1/4"	1.181	3.307	2.953	4.528	1.57	BR2FT-125
1 1/2"	1.496	3.661	3.346	5.512	2.4	BR2FT-150
2"	1.850	4.181	3.681	5.512	3.37	BR2FT-200

Pressure-Temperature Ratings

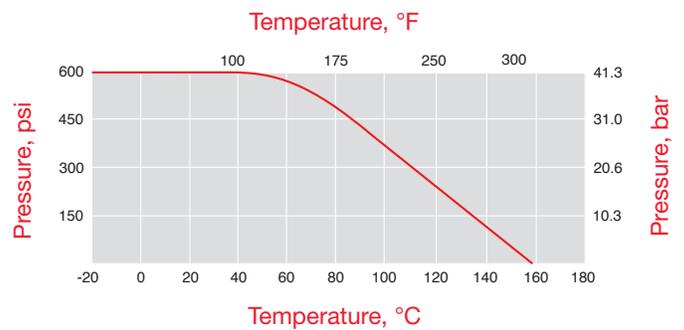

△UBV ball valves are designed to be used in the fully open or fully closed position.

Safe Product Selection

When selecting a product, the total system design must be considered to ensure safe, trouble-free performance. Function, material, compatibility, adequate ratings, proper installation, operation and maintenance are the responsibilities of the system designer and user.

